

ERGOSWISS

table lift systems



NEW PRODUCTS,
ADDITIONAL ARTICLES
AND ACCESSORIES

24 V CONTROL EXCHANGEABLE BATTERY

With the battery solution, transport trolleys, assembly tables, side tables or similar items can be moved flexibly from A to B and can be adjusted in height.

The 24 V control is operated by an exchangeable battery. The battery can be mounted under the table with a holder. When the battery is empty, it can be recharged in the battery charging station. The charging time is 6 h.

Operation with hand switch Memory.

Lifting system SL EU/CH 12 battery

2430 Art. No. 901.21516 (2 Lifting columns)

2440 Art. No. 901.21517 (2 Lifting columns)




Complete SL screw jack system with control, interchangeable battery, -holder, -charging station and hand switch.

- Max. load 300 kg
- Max. stroke 300 mm
- Lifting speed max. 7.5 mm/s

Other battery solutions for SK, SM, SN and SO lifting systems on request.

Lifting system SLA.3 EU/CH 12 battery

4330 Art. No. 903.42536 (4 Linear units)

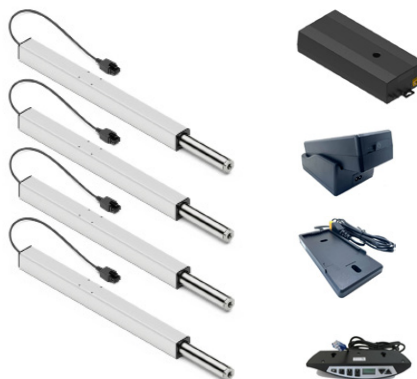

Spindle-driven linear units SLA with control, exchangeable battery, -holder, -charging station and hand switch.

- Max. load 300 kg
- Max. stroke 300 mm
- Lifting speed max. 8.5 mm/s

Other battery solutions for SLG, SE and SQ lifting systems on request.

24 V CONTROL EXCHANGEABLE BATTERY

With the battery solution, transport trolleys, assembly tables, side tables or similar items can be moved flexibly from A to B and can be adjusted in height.

The 24 V control is operated by an exchangeable battery. The battery can be mounted under the table with a holder. When the battery is empty, it can be recharged in the battery charging station. The charging time is 6 h.

Operation with hand switch Memory.

Lifting system SNT EU 12 battery
1770 Art. No. 911.51501 (1 Lifting columnn)



Complete SNT screw jack system with control, interchangeable battery, -holder, -charging station and hand switch.

- Max. load 150 kg
- Max. stroke 700 mm
- Lifting speed max. 25 mm/s

24 V CONTROL EXCHANGEABLE BATTERY

Control box SCT4 iSMPS 24V

Art. No. 124.4xx9x



Control:

- Number of motor connections 1 - 4
- Output power 240 W
- Output voltage 24 V
- Output current 10 A
- Input voltage 25.2 V
- Dimensions (L x W x H) 309 x 120 x 55 mm

Exchangeable battery 10A

Art. No. 124.00271



Exchangeable battery:

- Max. discharge current 10 A
- Capacity 6'000 mAh
- Technology Li-Ion

Holder for exchangeable battery 10A

Art. No. 124.00272



The holder for the exchangeable battery is required for the power supply of the SCT4 24 V controller.

Charging station for exchangeable battery 10A

Art. No. 124.00274



The charging station is required to charge the exchangeable battery 10A.

Control box SCT4 iSMPS 24V with exchangeable battery

Art. No. 124.9xx9x

Set consisting of:

- 124.4xx9x Control box SCT4 iSMPS 24V
- 124.00271 Exchangeable battery 10A
- 124.00272 Holder for exchangeable battery 10A
- 124.00274 Charging station for exchangeable battery 10A
- 124.00281 Hand switch memory T6